


e-Sense Move Highbay

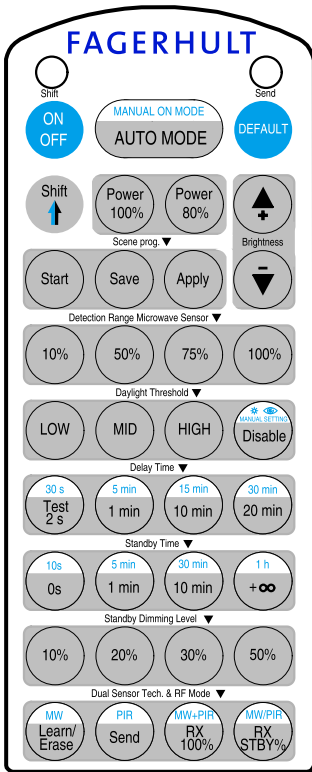

Art.no. 86368

Luminaire with e-Sense Move Highbay can control 20pcs of standard DALI loads. All settings can be programmed with Fagerhult remote control FRC-11 art.no. 86368

For more information and connection diagram, please go to www.fagerhult.com


FACTORY SETTINGS

Delay time: 1min.
Standby time: 5min.
Standby dimming level: 20%
Daylight Threshold: Disabled
RF signal STBY%: 100%
Sensor active: PIR (MW disabled)


RADIO SPECIFICATION

Operating frequency bands and output power (EIRP):
5800 MHz (-7,8 dBm) and 868 MHz (-2,07 dBm)


-525 e-Sense Move Highbay,
Aisle/corridor

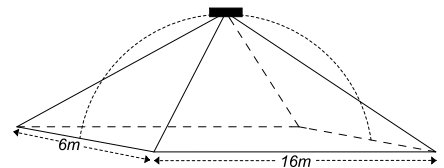

-526 e-Sense Move Highbay,
Open area



Maximum mounting height for luminaire with sensor

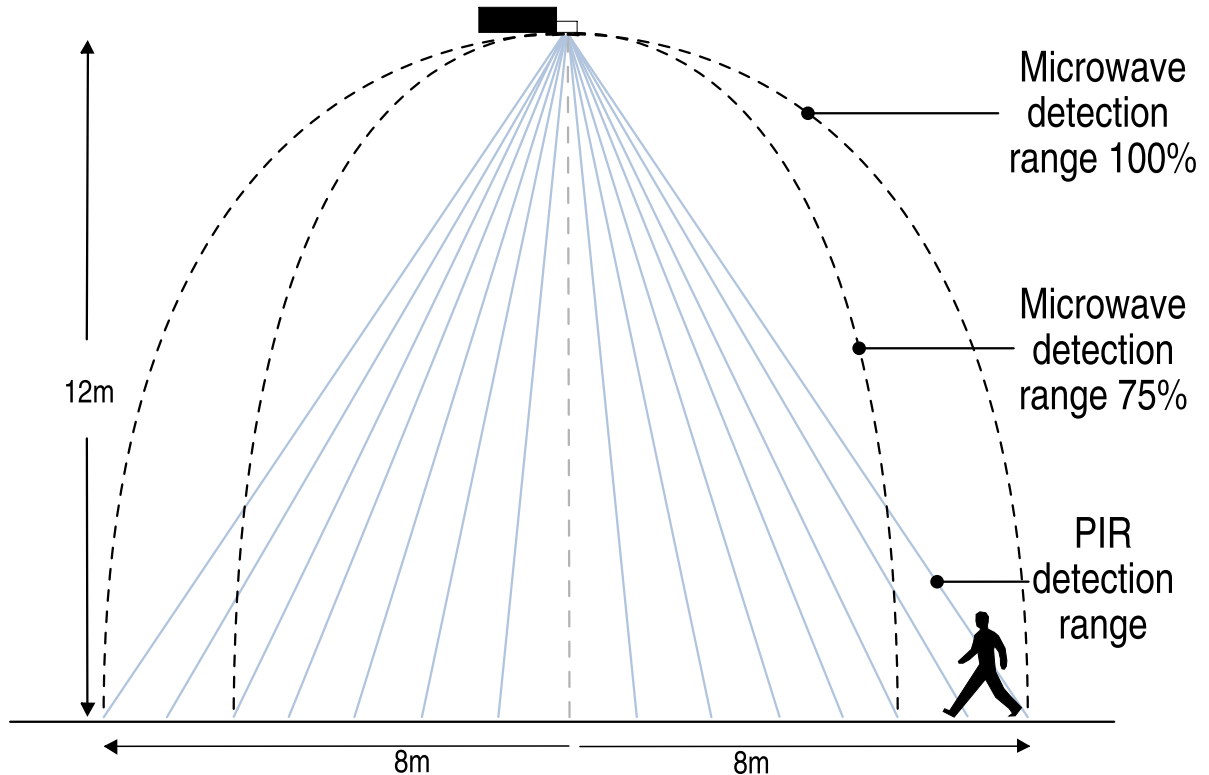

Detection range for PIR and Microwave sensors at maximum height

5415891 Utgåva/Edition 05

S Det är lämpligt att denna information överlämnas till användaren av anläggningen.

GB It is appropriate that this information is passed on to the users of the installation.

D Diese Informationen sind für den Benutzer der Anlage vorgesehen.

SF Nämä ohjeet tulee säilyttää ja luovuttaa kiinteistön käyttäjälle.

