


e-Sense Organic I/O box


Recessed

1

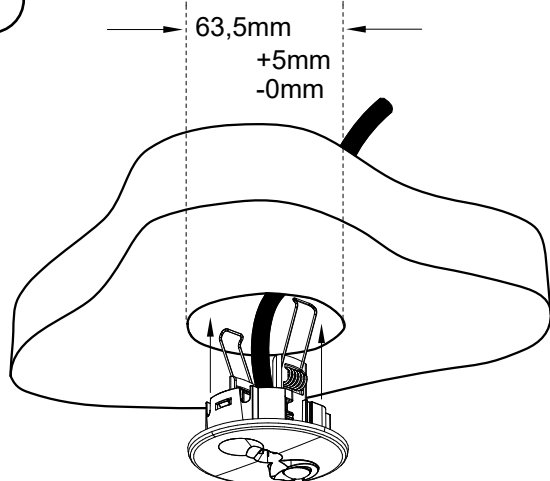


Up to 30mm(max)

2

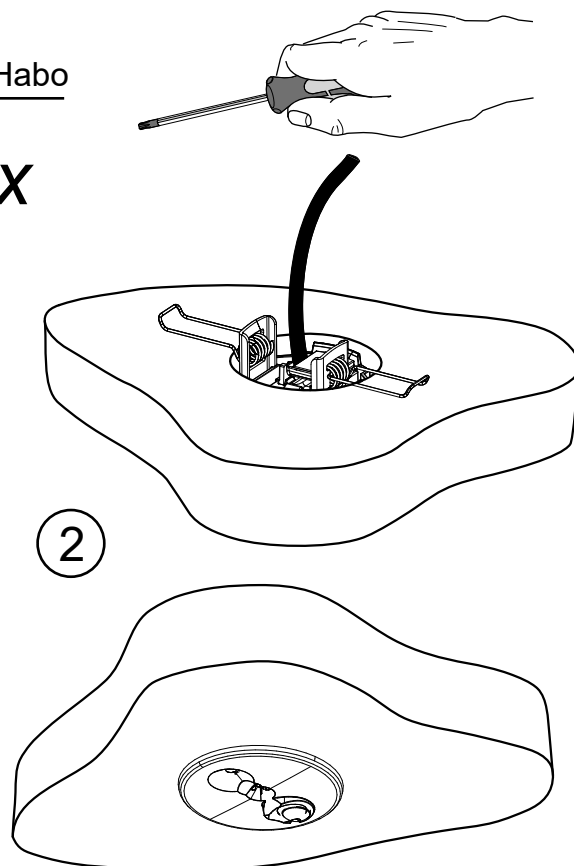


Surface

1

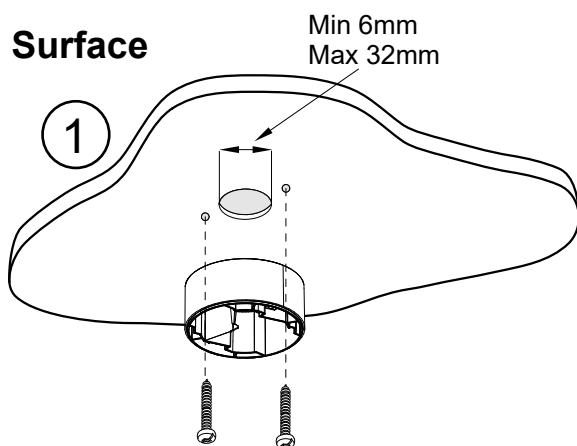

Ø4,8mm Front Mounting

51mm




Ø3,2mm Rear Mounting


51mm

ALT.


1

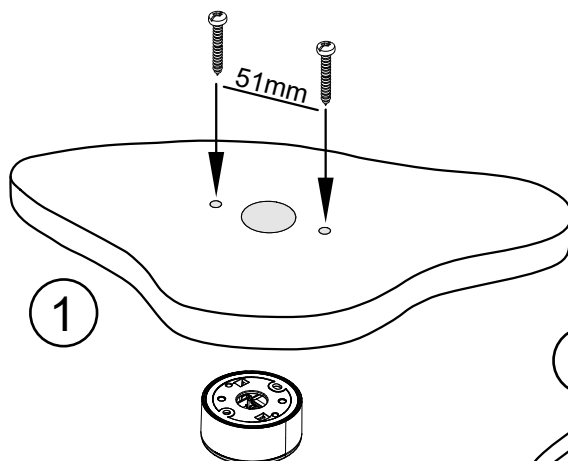

2

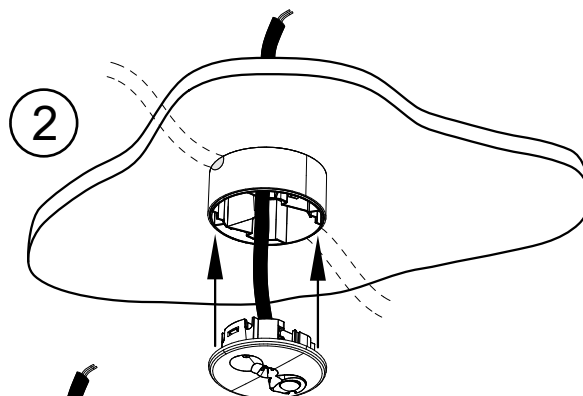


3

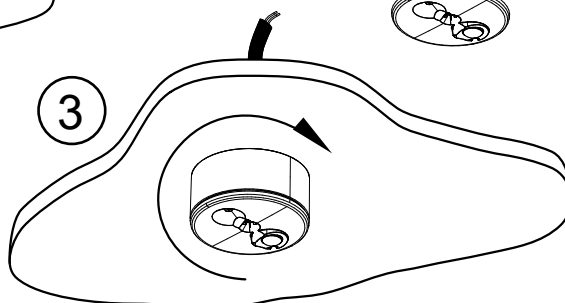


FAGERHULT

SE - 566 80 Habo

Suspended

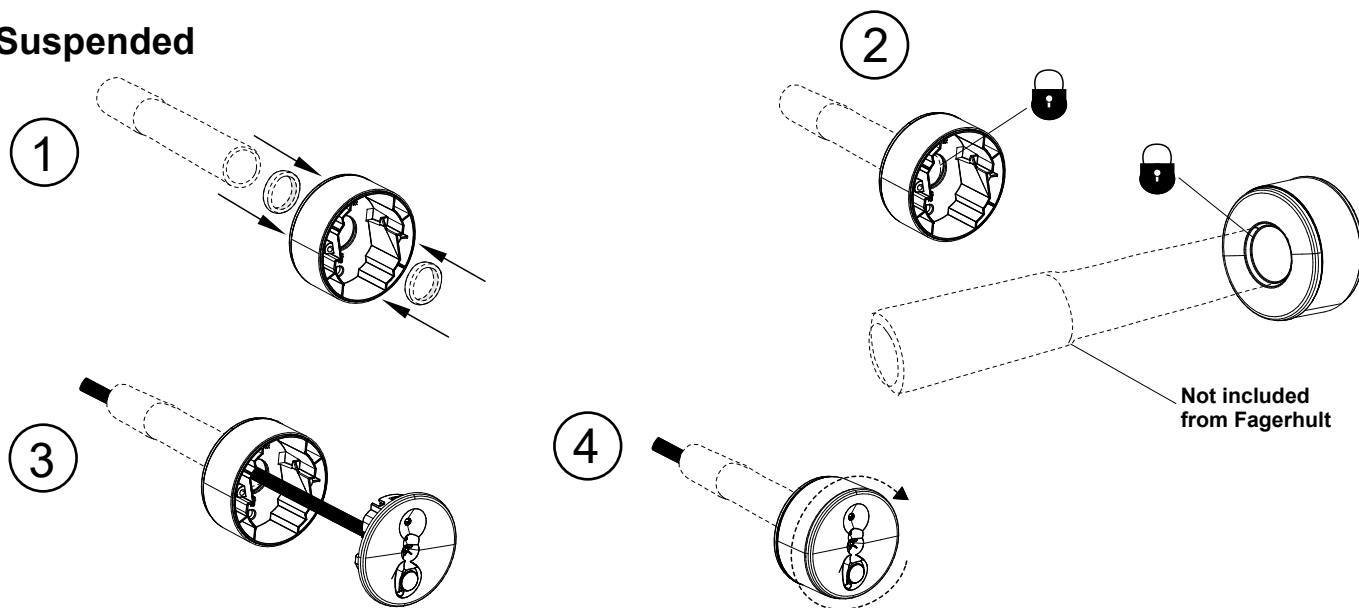


I/O box

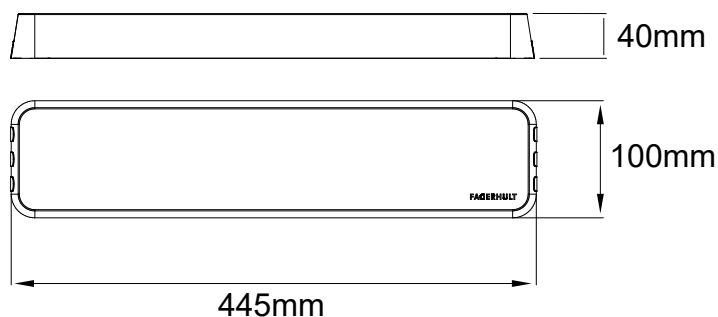

Surface


Recessed

Suspended

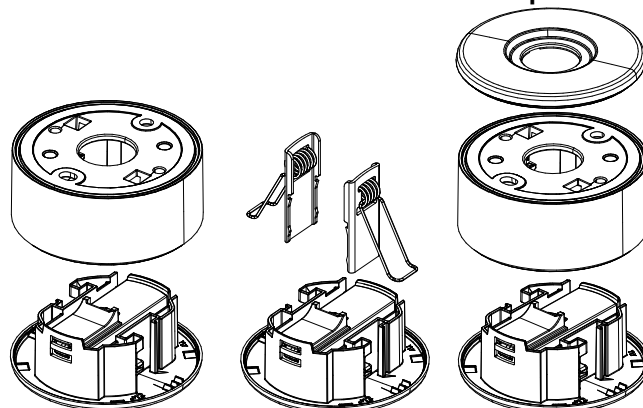

I/O box

Max 4 drivers connected to 1 I/O box via DALI

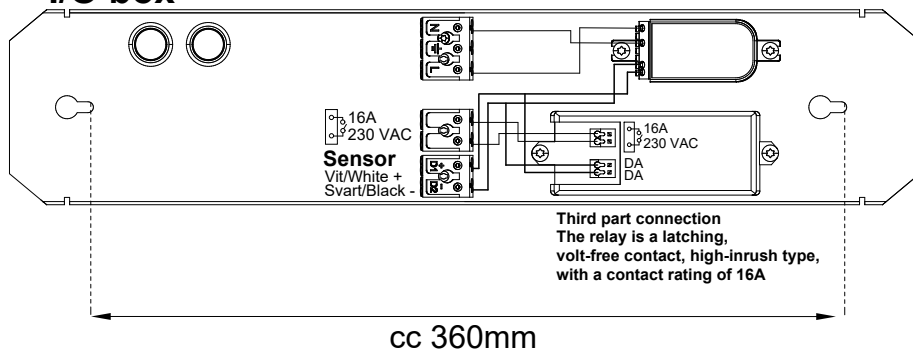

5425637 Utgåva/Edition 02

- (S) Grundläggande isolering mellan nät och styr ledning.
- (GB) Basic insulation between mains and control wiring.

Rekomenderad placering/
Recommended placement

