




Organic Response I/O Box Recessed

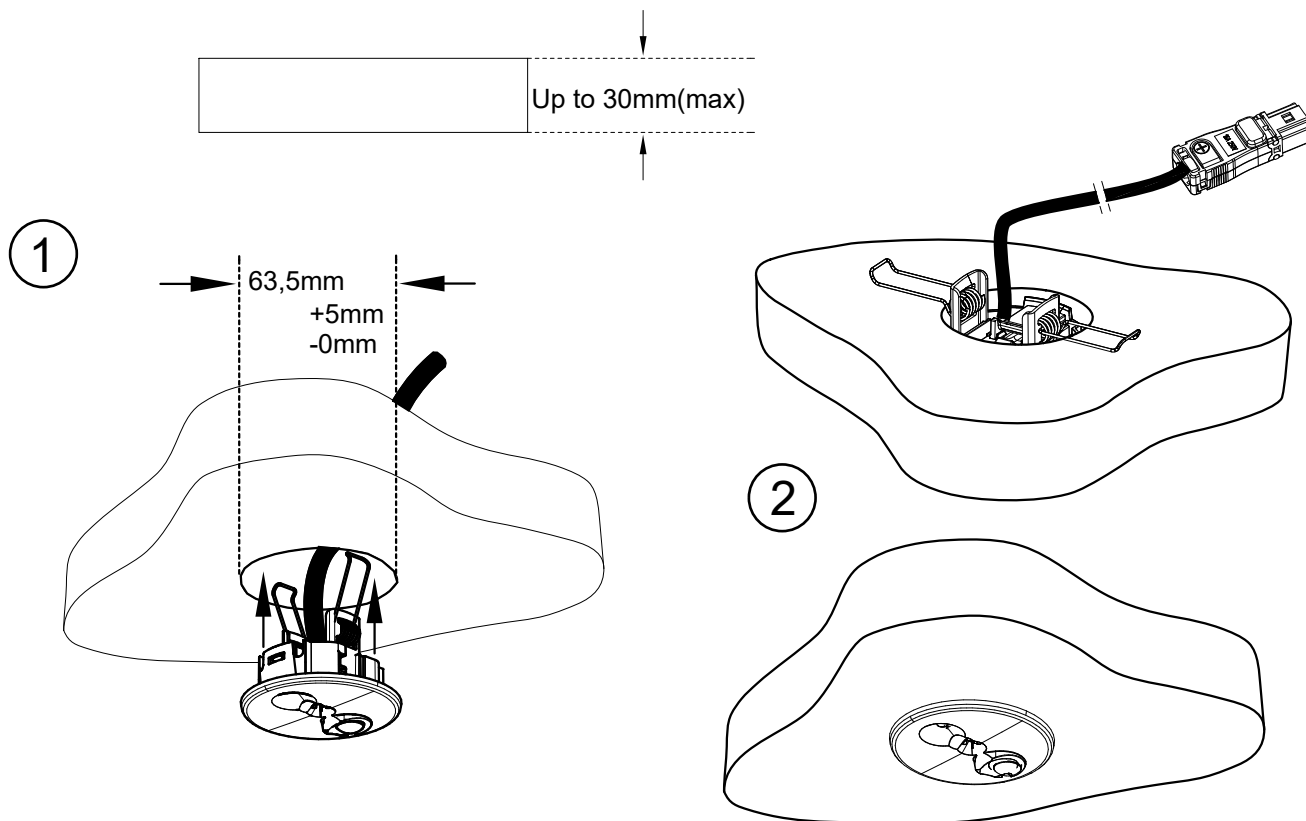

Stand alone box

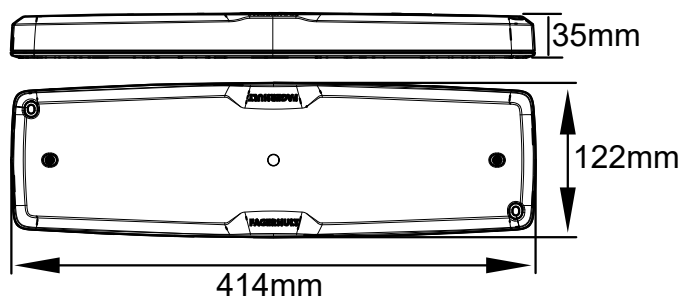


Max 12 DALI load and emergency devices
connected to one Stand alone box




FAGERHULT

SE - 566 80 Habo

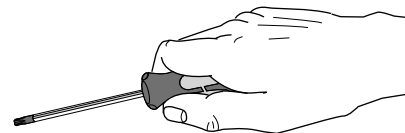

Organic Response I/O Box Recessed

Art.no	QC In	QC Out
86634	Wago	Wago
86635	Wieland	Wieland
86636	Ensto	Ensto

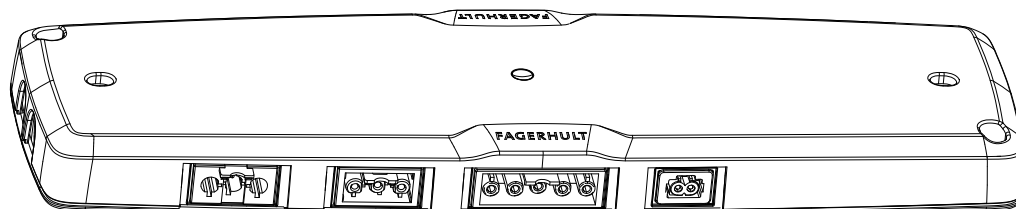

Quick connection Quick connection Quick connection Sensor

In Out 3-pole Out 5-pole


L L' L

N N N

⊕ ⊕ ⊕

8A Dali Dali

86637

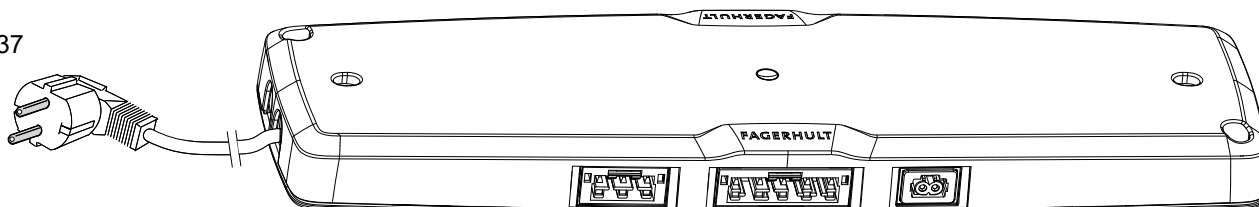

Wago out 3-pole Wago out 5-pole Sensor

L' L



N N

⊕ ⊕

8A Dali Dali


86638

Third part connection
The relay is a latching,
volt-free contact, high-inrush type,
with a contact rating of 8A

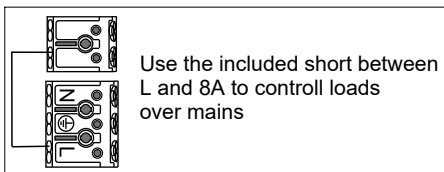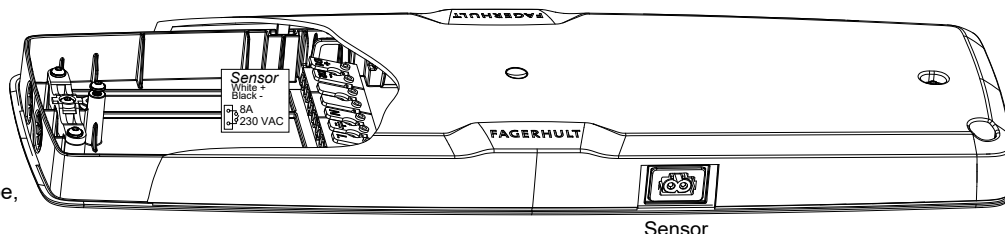

Härmed försäkrar Fagerhult att dessa typer av radioutrustningar T0123R överensstämmer med direktiv 2014/53/EU.
Hereby, Fagerhult declares that the radio equipments type T0123R are in compliance with Directive 2014/53/EU and UK SI 2017 No. 1206.

Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: www.fagerhult.com/declaration-of-conformity
The full text of the EU declaration of conformity is available at the following internet address: www.fagerhult.com/declaration-of-conformity

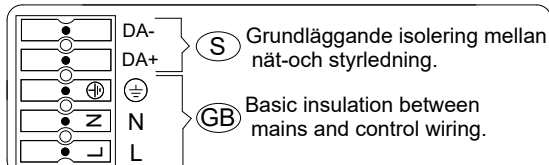

Operating frequency bands and output power (EIRP):
Frequency band: 2.4 GHz
Output power (4dBm max within our operating band)

<https://www.fagerhult.com/lighting-control/>

S Det är lämpligt att denna information överlämnas till användaren av anläggningen.

GB It is appropriate that this information is passed on to the users of the installation.

Manufactured by Fagerhult
For UK market importer Fagerhult UK
33-34 Dolben Street, London, SE1 0UQ