





Organic Response Alarm integration box Recessed

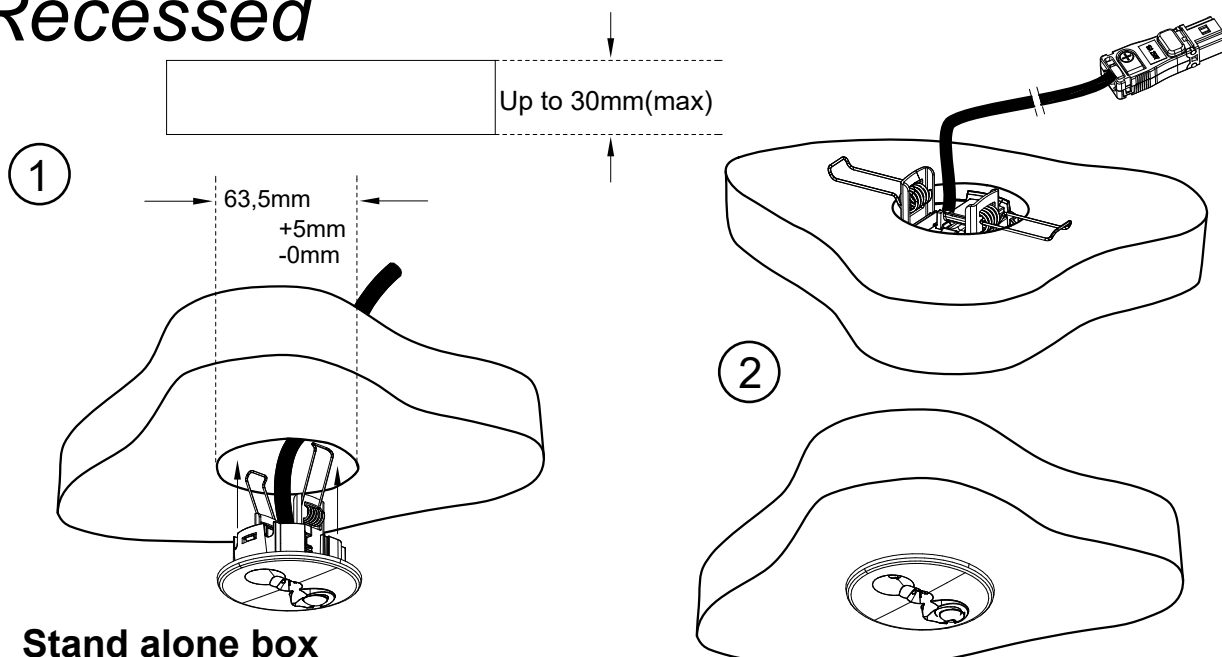


Stand alone box

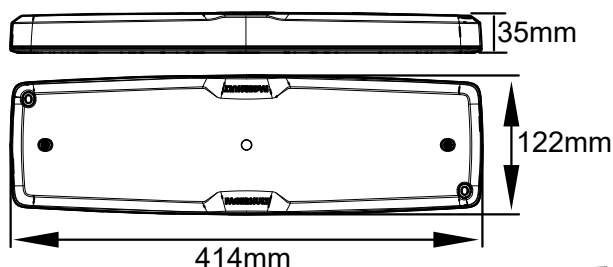

Channel / Input	On Closing Contact	On Opening Contact
Input 1	ON / Auto	OFF (Scene 7)
Input 2	OFF (Scene 7)	ON / Auto
Input 3	ON / Auto	100% (Scene 5)
Input 4	100% (Scene 5)	ON / Auto

Max 12 DALI load and emergency devices connected to one Stand alone box.

Max cable length between Input unit and potential free button/switch is 0,5m

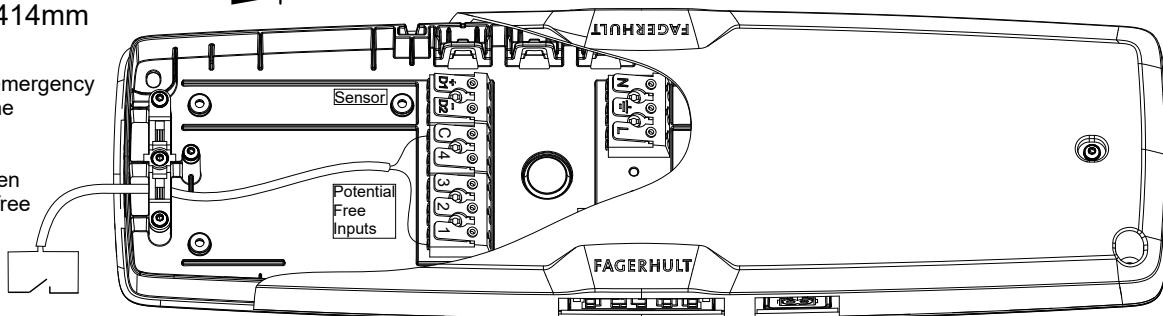

Wago out


Sensor

Max 1 external Organic response sensor per AIB/LLI box
The cable can be spliced to a maximum length of 150m

Härmed försäkrar Fagerhult att dessa typer av radioutrustningar T0123R överensstämmer med direktiv 2014/53/EU.
Hereby, Fagerhult declares that the radio equipments type T0123R are in compliance with Directive 2014/53/EU and UK SI 2017 No. 1206.

Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: www.fagerhult.com/declaration-of-conformity
The full text of the EU declaration of conformity is available at the following internet address: www.fagerhult.com/declaration-of-conformity

<https://www.fagerhult.com/lighting-control/>

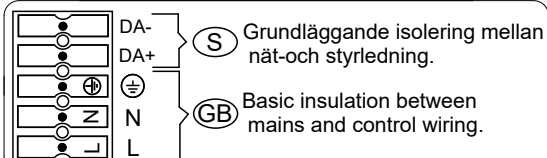

Operating frequency bands and output power (EIRP):
Frequency band: 2.4 GHz
Output power (4dBm max within our operating band)

S Det är lämpligt att denna information överlämnas till användaren av anläggningen.

GB It is appropriate that this information is passed on to the users of the installation.

Manufactured by Fagerhult
For UK market importer Fagerhult UK
33-34 Dolben Street, London, SE1 0UQ