
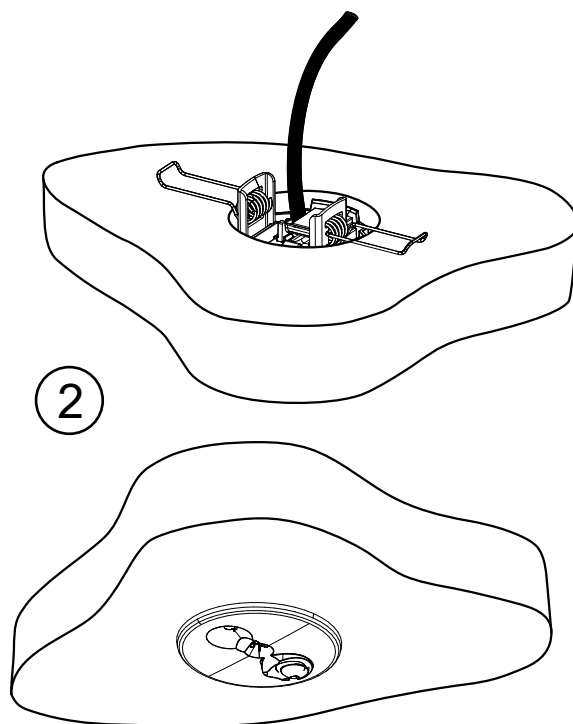


FAGERHULT

SE - 566 80 Habo



e-Sense Organic Stand-alone sensor

Recessed

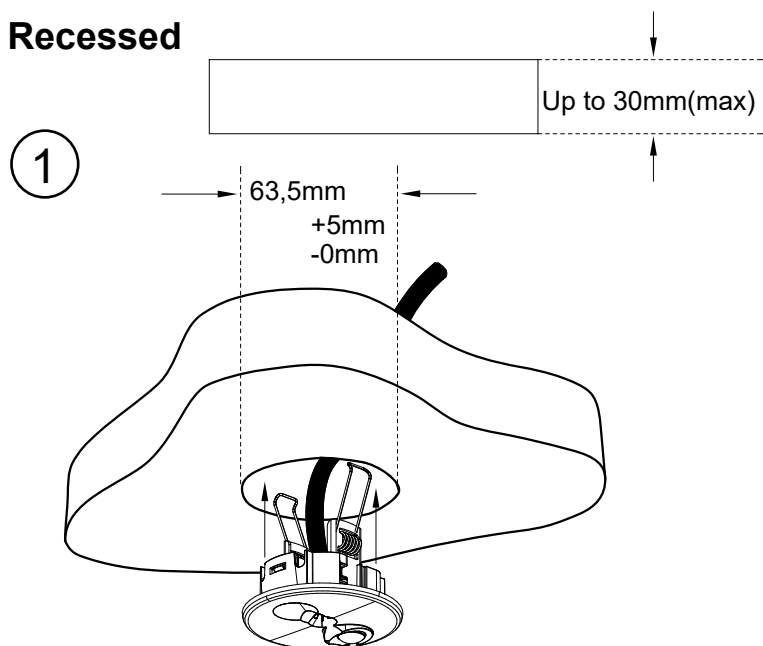


Stand alone DALI PSU



N Blå/Blue
L Brun/Brown
DA- Svart/Black
DA+ Grå/Grey



Recessed




Suspended

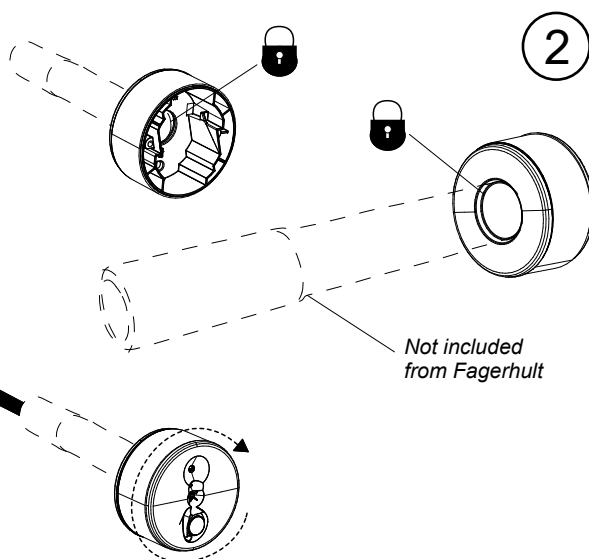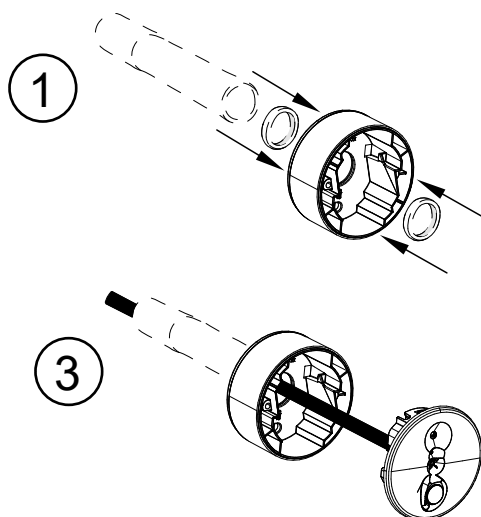





FAGERHULT

SE - 566 80 Habo


Surface

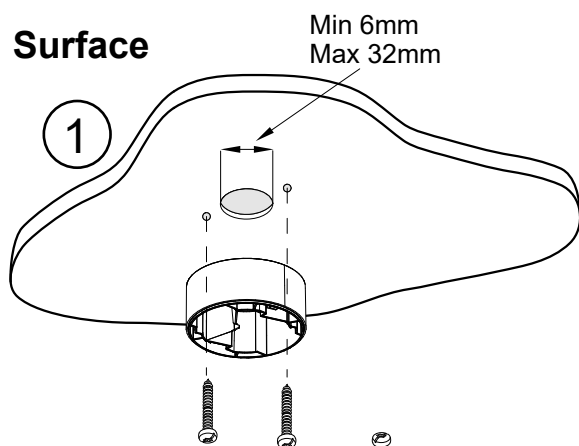

ALT.

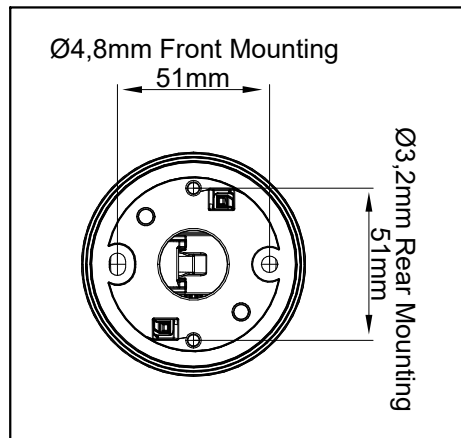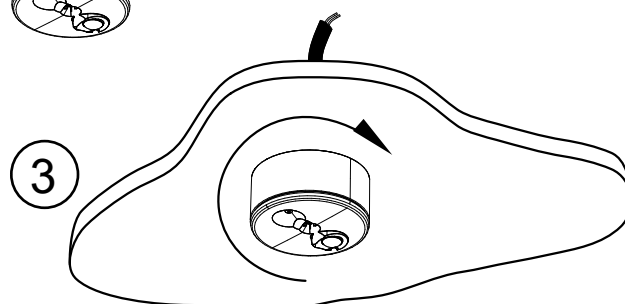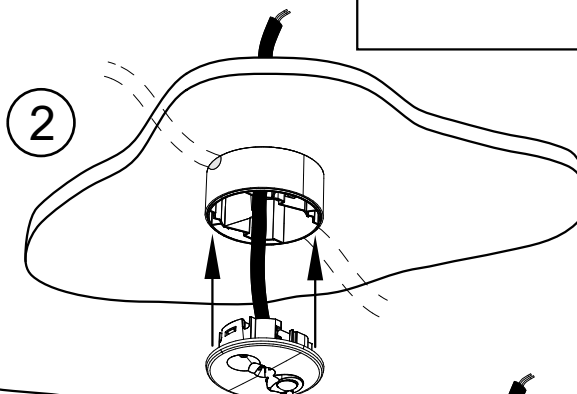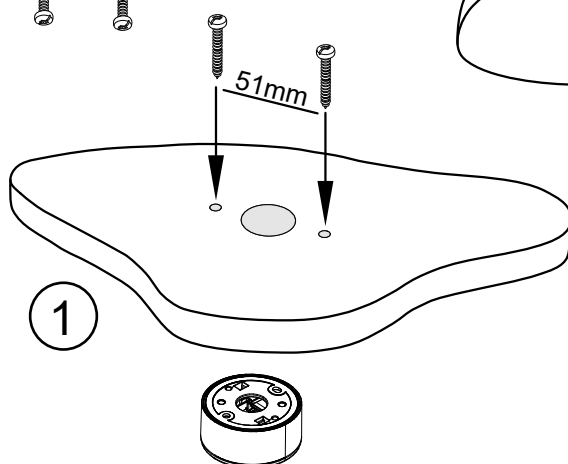


Stand alone box

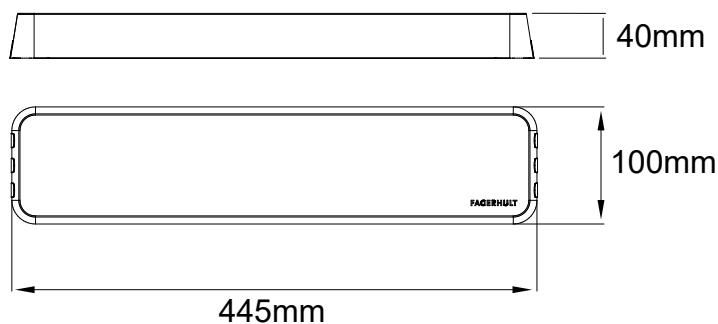


Suspended

Surface

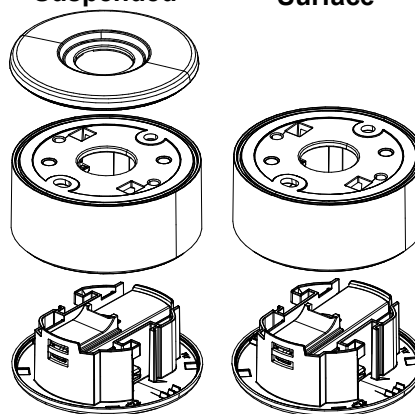

Stand alone BOX

Max 4 drivers connected to 1 Stand alone box

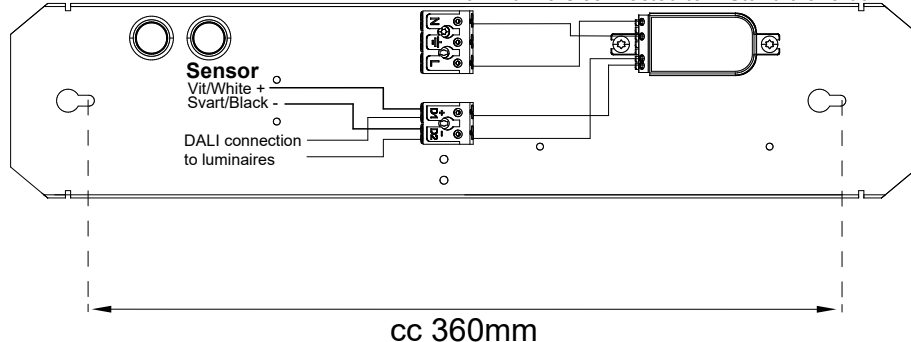

- (S) Grundläggande isolering mellan nät och styr ledning.
- (GB) Basic insulation between mains and control wiring.

<https://www.fagerhult.com/lighting-control/>