




Evolume G2

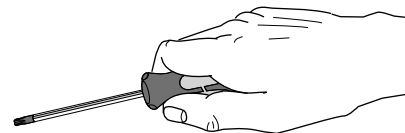


Evolume 75

Max weight: 5 kg
Max projected area:
From below: 0,118 m²
From the side: 0,029 m²





Evolume 1

Max weight: 7 kg
Max projected area:
From below: 0,160 m²
From the side: 0,038 m²




Evolume 2

Max weight: 12 kg
Max projected area:
From below: 0,255 m²
From the side: 0,053 m²

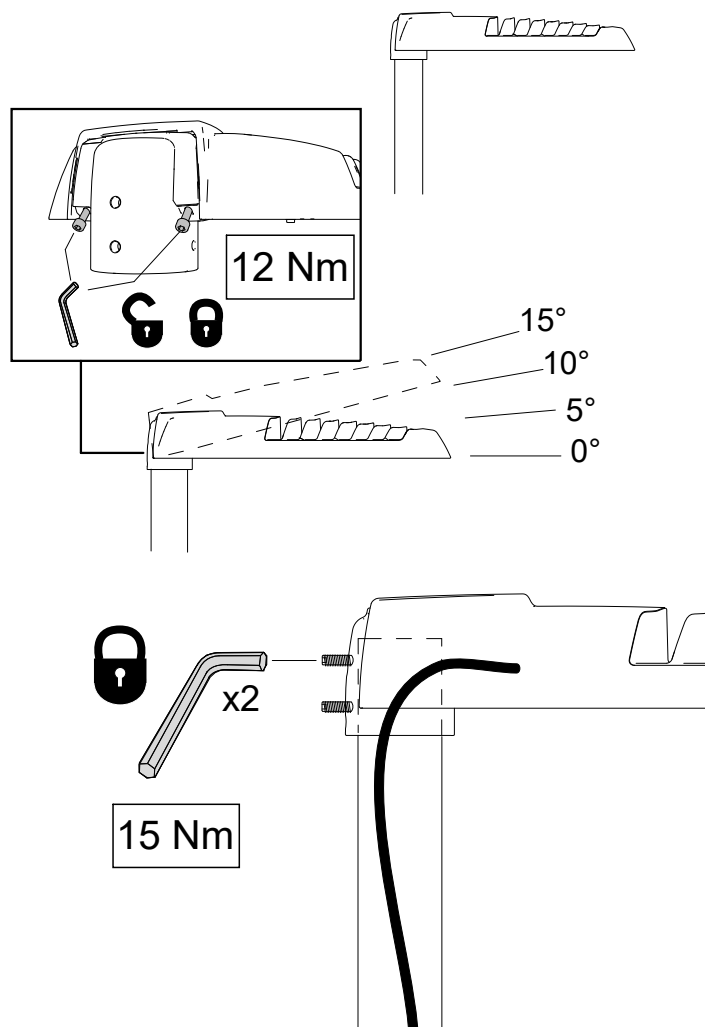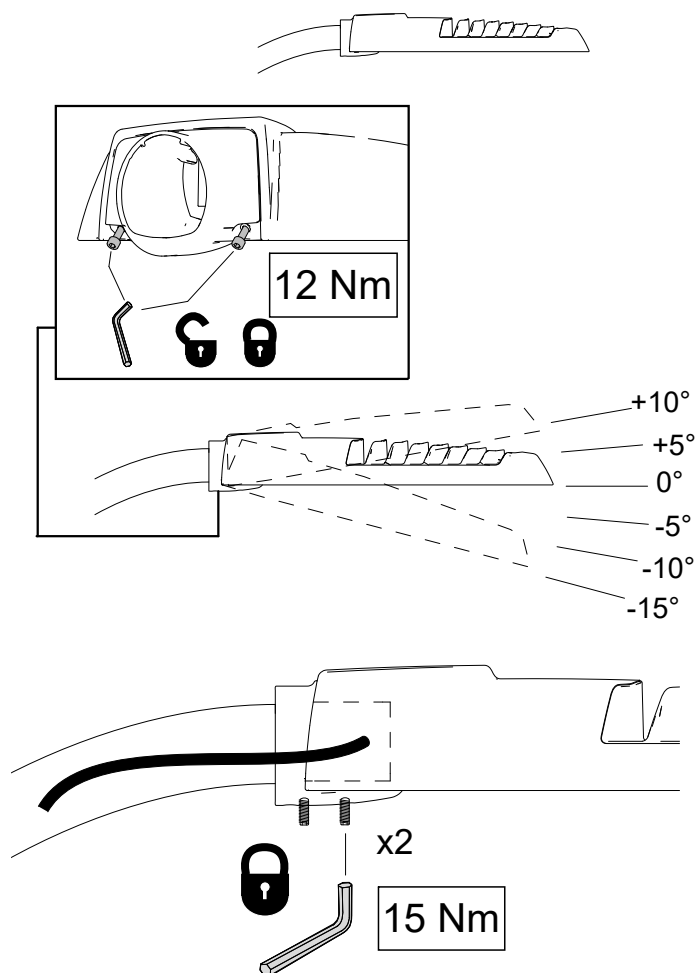

Manufactured by Fagerhult Sweden.
For UK market importer Fagerhult UK
33-34 Dolben Street, London, SE1 OUQ



Ljuskällan ska enbart bytas ut av
tillverkaren eller dess utsedda person.

The light source shall only be replaced by the
manufacturer or its designated person.


(S) Det är lämpligt att denna information
överlämnas till användaren av anläggningen.

(GB) It is appropriate that this information
is passed on to the users of the installation.

Class II


(S) Om armaturens kabel skulle skadas
skall den bytas av tillverkaren, eller
av tillverkaren utsedd person.

(GB) If the cord of this luminaire is damaged,
it shall exclusively be replaced by the
manufacturer, or by the manufacturer
designated person.



(S) Armaturen bör placeras så att långvarigt tittande
direkt in i armaturen inte förväntas på ett avstånd närmre än 1 m.

(GB) The luminaire should be positioned so that prolonged staring into the
luminaire at a distance closer than 1 m is not expected.



(S) Grundläggande isolering
mellan nät och styr ledning.

(GB) Basic insulation between
mains and control wiring.