FAGERHULT SE - 566 80 Habo

ML Hydro G3 surface mounted

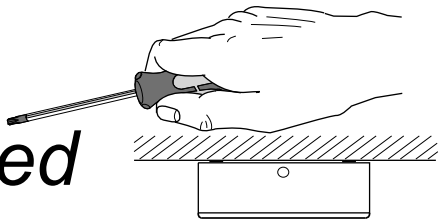

IP65, Robust IP44

Observera gällande hanteringsföreskrifter mot elektrostatisk urladdning.

Notice management regulations against electrostatic discharge.

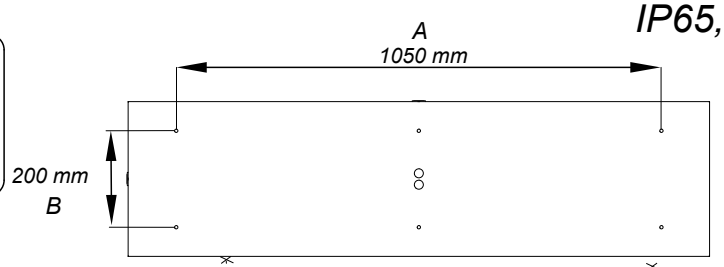

	A	B
300x600	450	200
600x600	450	450
300x1200	1050	200

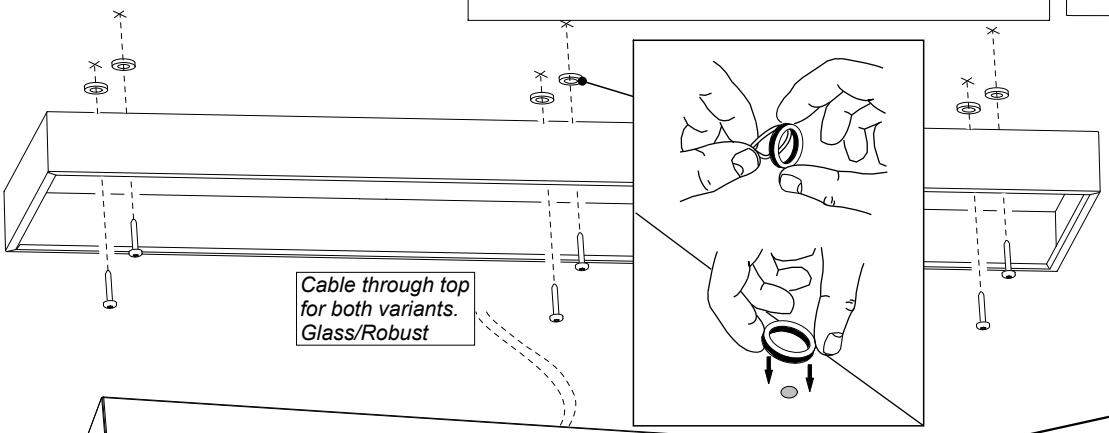

Cable through top for both variants. Glass/Robust

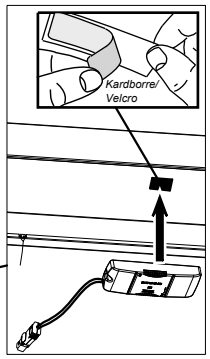

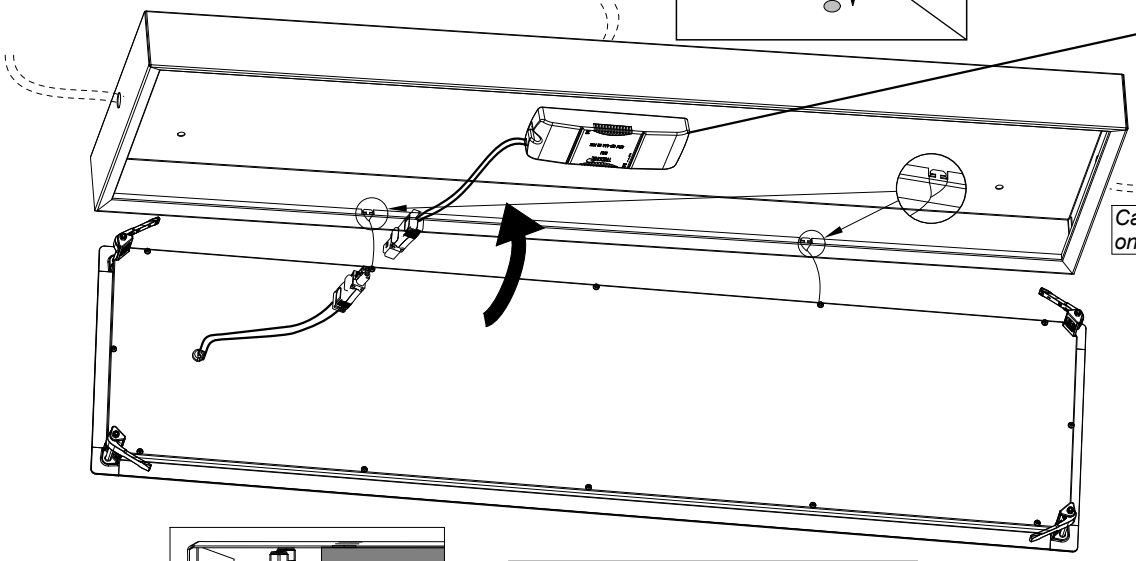

Cable through short side only for glass variant



When installing luminaire:
Press frame against body and cross-tighten screws with right torque.



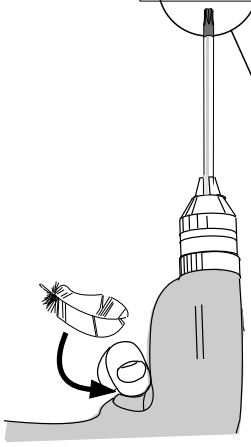

T20	Max 3Nm
T20	Max 3Nm

(S) Service och utbyte av drivdon och ljuskälla får endast utföras av tillverkaren, deras serviceombud eller annan behörig person.

(GB) Servicing and replacement of control gear and light source shall be carried out by the manufacturer, their service agent or a similarly skilled person.





(S) Grundläggande isolering mellan nät och styrledning.

(GB) Basic insulation between mains and control wiring.

(S) Det är lämpligt att denna information överlämnas till användaren av anläggningen.

(GB) It is appropriate that this information is passed on to the users of the installation.

(S) Det är lämpligt att denna information överlämnas till användaren av anläggningen.

(GB) It is appropriate that this information is passed on to the users of the installation.

Manufactured by Fagerhult Sweden.
For UK market importer Fagerhult UK
33-34 Dolben Street, London, SE1 OUQ

5463379 Utgåva/Edition 03