



FAGERHULT




SE - 566 80 Habo

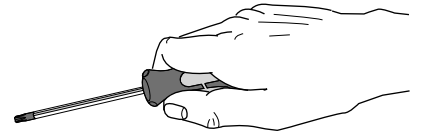

Relay Slim

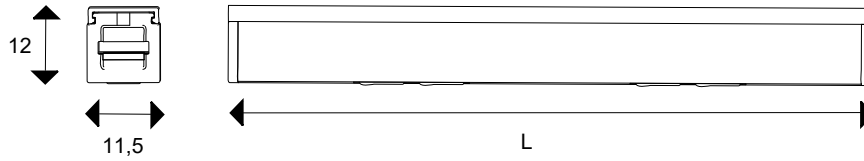

L	CCT	CRI	Power
100	4000	80	1W
565	4000	80	5.8W
840	4000	80	8.6W
100	3000	80	1W
565	3000	80	5.8W
840	3000	80	8.6W
100	3000	90	1.2W
565	3000	90	7.2W
840	3000	90	10.8W

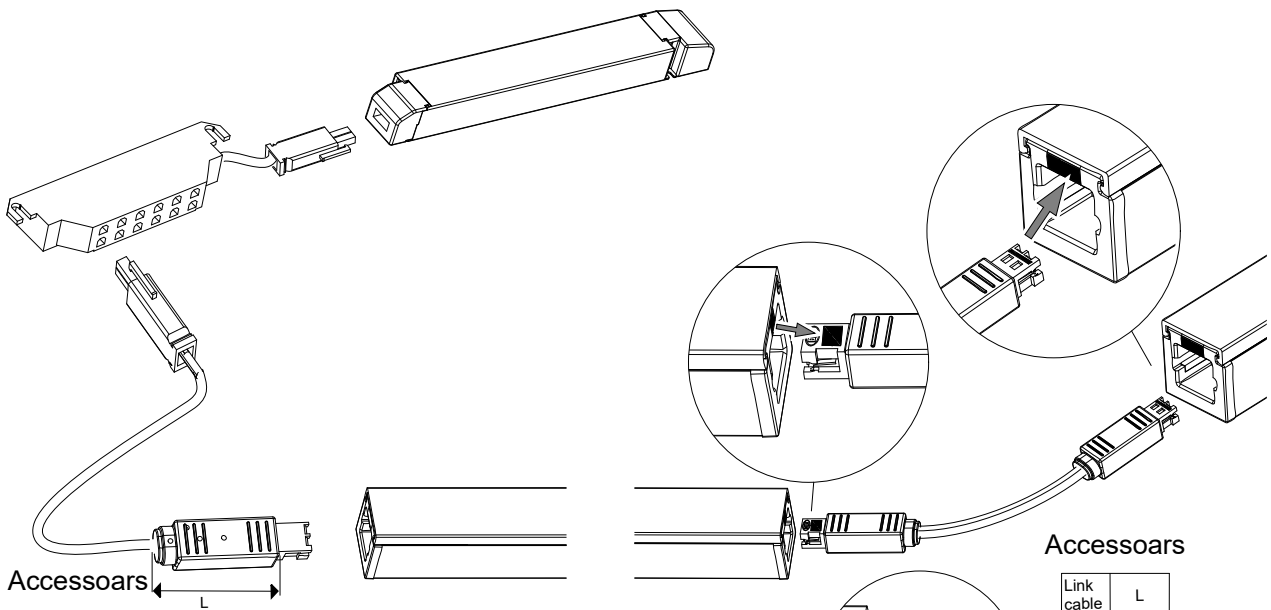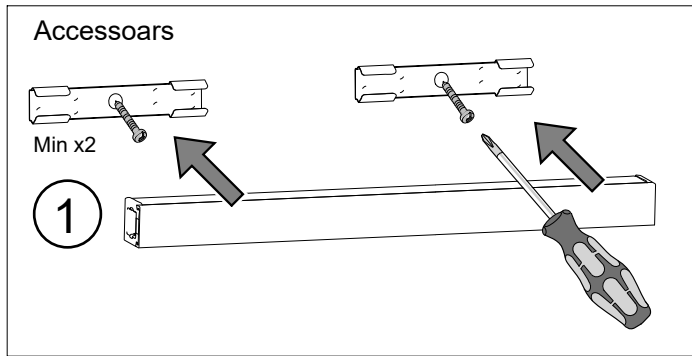
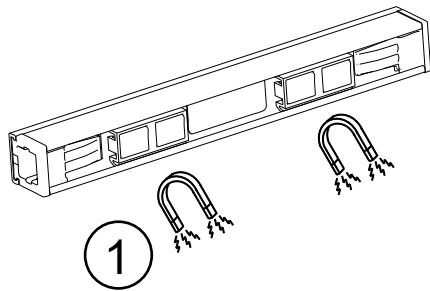


Accessoars

Start cable	L
2500	26.5
5000	26.5

Accessoars

Link cable	L
48	8.3
300	26.5
500	26.5

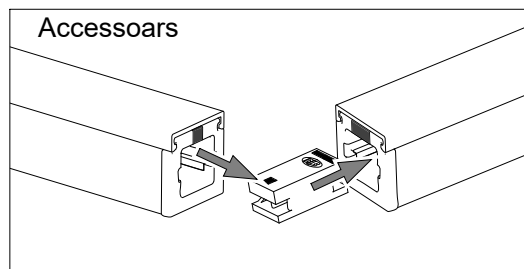


Max 5m

5425969 Utgåva/Edition 01

S Det är lämpligt att denna information överlämnas till användaren av anläggningen.

GB It is appropriate that this information is passed on to the users of the installation.



Ljuskällan ska enbart bytas ut av tillverkaren eller hans utsedda person.
The light source shall only be replaced by the manufacturer or his designated person.