


TECHNICAL DATA SHEET

Organic Response I/O recessed with
Quick connection box 8A/16A

FAGERHULT

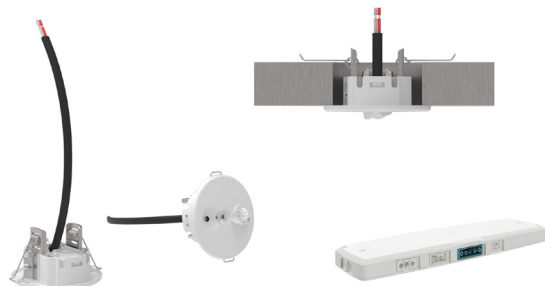

Art. no: 86629-86638

External Organic Response G3 sensor incl. quick connection box
with Dali PSU & Single channel relay unit

I/O box with a 230V relay switch for controlling external devices via
switched mains. By default the relay closes upon presence detection.
The I/O box can also control max 12 Dali loads and emergency
devices connected to one box. Available with Wago, Wieland and
ENSTO Quick Connectors.

TECHNICAL DATA

MATERIALS	Plastic: LG LUPOY SR3108FT (WU153) Metal: Zincanneal 0.60 mm Spring: Music Wire 1.0 mm
CUT-OUT DIMENSIONS	Ø 63.5 mm + 5 mm / - 0mm
CEILING THICKNESS	Up to 30 mm (max)
ELECTRICAL SAFETY COMPLIANCE	AS/NZS 61347.2.11:2003 AS/NZS 61347.1:2016 IEC/EN 61347-12-11:2001 IEC/EN 61347-1:2015
EMC COMPLIANCE	EN 55015: 2015 EN 61547: 2009 ETSI EN 301 489-1 V2.1.1 (2017-02) ETSI EN 301 489-17 V2.2.1 (2012-09) ETSI EN 301 489-1 V3.1.1 (2017-02)
COMPLIES WITH EC DIRECTIVES	EMC Directive 2014/30/EU Radio Equipment Directive 2014/53/EU RoHS2 Directive 2011/65/EU
DIMMING	Logarithmic
SENSOR NODE (tc)	0 °C ... 55 °C
NODE TO NODE COMMUNICATION PROTOCOL - CONTROL	Wireless Infrared Organic Response
NODE TO NODE COMMUNICATION PROTOCOL - DATA	Wirepas - Wireless RF
RF FREQUENCY BAND	2.4 GHz
RF RANGE - NODE TO NODE	8 m - non LOS (max)
DETECTION AREA	2.7 m installation height - 5 m Ø on floor
SENSOR TYPE	PIR
POTENTIAL-FREE RELAY	Max 8A or 16A 230 VAC