

FAGERHULT



Terso

Terso and Terso Flat are two powerful pendant luminaires with a simplistic design that is key to catching the onlooker's eye.


Producing a comfortable general light, and available in two different sizes, Terso is an ideal solution for reception desks, entrances and meeting rooms, irrespective of ceiling height. Terso's high gloss surface in black or white is mirrored by the ceiling cup, and is connected via a coloured fabric cable to provide a consist style. To add some additional variety Terso can be produced in an array of different colours to match either a brand or interiors palette.

Terso Flat has a thin and elegant appearance that emphasises any environment with either a matt white or matt black shade. The inside of the luminaire is painted white, which reduced the contrast between the LED light source and the matt shade.







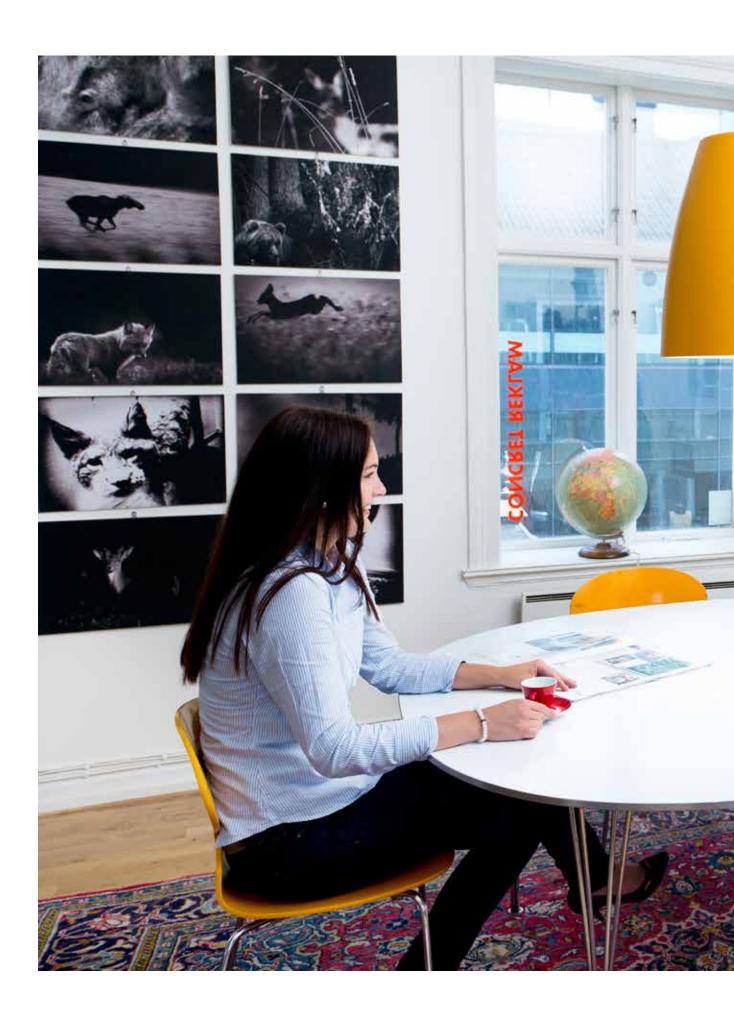



















Luminaire w	Luminaire with LED									
System, W	kg	Ø	Colour temp., K	lm	lm/W	Ra (CRI)	SDCM	Life time	White	Black
21	2.5	250	3000	1680	80	≥ 80	3	L ₇₀ B ₅₀ 50.000 h	54530-402	54532-402
20	2.5	250	4000	1680	84	≥ 80	3	L ₇₀ B ₅₀ 50.000 h	54531-402	54533-402
31	3.9	400	3000	2370	76	≥ 80	3	L ₇₀ B ₅₀ 50.000 h	54534-402	54536-402
29	3.9	400	4000	2370	82	≥ 80	3	L ₇₀ B ₅₀ 50.000 h	54535-402	54537-402

Suffix code

required function. Accessories Cutters/each

☐ -368 DALI/Phase-pulse control

Add suffix code to the end of the luminaire part number to indicate

For current information, please refer to our website.

Luminaire					
FSM-E	kg	Ø	White	Black	
1×18	2.5	250	54550	54560	
1×26/32	2.5	250	54551	54561	
1×42	3.9	400	54555	54565	
2×42	3.9	400	54556	54566	
1×57	3.9	400	54557	54567	

Light sour	ce							
W	Socket	830	840					
- ¶⊞ Comp	◆ Compact fluorescent lamp FSM-E							
18	GX24q-2	81327	81475					
26	GX24q-3	81309	81476					
32	GX24q-3	81329	81477					
42	GX24q-4	81331	81478					
57	GX24q-5	81334	81336					

For further information on Light source, please refer to our website.

Installation

Two point suspension, c/c 55–78 mm.

Connection

Snap-in terminal block 5×1.5 mm², through-wiring possible.

Design

The luminaire shade in spun aluminium, specular black or white. Other colours on request. Supplied with colour coordinated fabric cord and specular, steel ceiling cup. Ø 250 mm: 2.3 m.

Ø 400 mm: 3.8 m.

Dimming Luminaire with LED is equipped with DALI/Phase-pulse control as standard.


Miscellaneous

Driver life-time: up to 100.000 h/10 % (max failure). A cut-out in the ceiling cup is made using cutters 94248 for a surface mounted mains cable.

Designed by

94248

Sabina Grubbe.

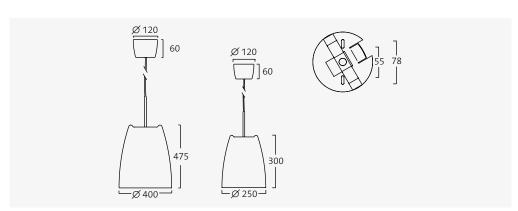



Colour coordinated cable and luminaire.













Luminaire								
System, W	Colour temp., K	lm	lm/W	Ra (CRI)	SDCM	Life time	White	Black
23	3000	1360	59	≥ 80	4	L ₈₀ B ₅₀ 100.000 h	54570-402	54571-402
23	4000	1610	70	≥ 80	4	L ₈₀ B ₅₀ 100.000 h	54572-402	54573-402

For current information, please refer to our website.

Accessories	
Cutters, each	94248

Installation

Three-point suspension.

Connection

Snap-in terminal block 5×1.5 mm², through-wiring possible. Connects with 230 V, built-in LED driver.

Design

Luminaire shade in spun steel plate, with either a matt black or white finish. Supplied with 2.3 metre fabric cord in the same colour and white ceiling cup in steel.

Dimming

DALI/Phase-pulse control as standard.


Miscellaneous

Driver life-time: up to 50.000 h/10 %(max failure).


Using cutters 94248, a cut-out is made in the ceiling cup for a surface mounted mains cable.

Designed by

Joakim Fihn.



Common style with Terso.

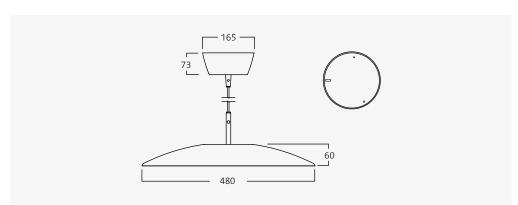



 ${\it LED\ driver\ integrated\ in\ the\ ceiling\ cup.}$



Fagerhult develops, manufactures and markets professional lighting systems for public environments. Our business is run with a constant focus on design, function, flexibility and energy-saving solutions.

Fagerhult is part of the Fagerhult Group, one of Europe's leading lighting groups with operations in more than 15 different countries. AB Fagerhult is listed on the NASDAQ OMX Nordic Exchange in Stockholm.

FAGERHULTS BELYSNING AB

HEAD OFFICE SE-566 80 Habo, Sweden Tel. +46 (0)36 10 85 00 Fax +46 (0)36 10 86 99 www.fagerhult.com